


NAME: LED Corn Light

P/N: NLS-CL-80W

Advantage

- CE RoHS certificate
- E26/E27/E39/E40 lamp base
- Warm / Natural / Cool / Cold white
- 360degree lighting, high CRI
- Big heat sink
- Internal driver, input voltage AC85-300V or DC12-24V
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long service life
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury

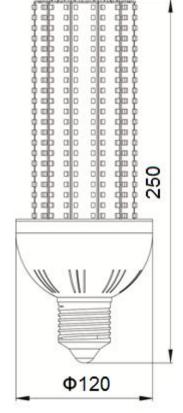



Application


Widely used in supermarket, warehouse, garage, home, office, hotel, hospital, school, street, garden etc.

NEWLITE SOLUTIONS LTD


Product name	LED Corn Light			
Part No	NLS-CL-80W			
Light Type	Corn Light			
Dimension	Φ 120*250mm			
Technical Characte	ristic			
Color	Warm white	Natural white	Cool white	Cold white
Color temperature	2700-3000K	4000-4250K	6000-6500K	7000-8000K
CRI	> 70	> 70	> 70	> 70
Lumen	8360.0	8680.0	9008.0	8848.0
Lumen Efficacy	104.5	108.5	112.6	110.6
Input Power	80 W			
Viewing Angle	360 degree			
Input Voltage	AC85-300V 50/60Hz			
PFC	>90%			
Equivalent	500W incandescent / 150W CFL			
Waterproof Rating	IP20			
MATERIALS				
LED Brand	EPISTAR			
LED Type	SMD2835			
LED QTY	546 PCS			
Housing	PC			
Housing color	White			
OTHERS				
Operating Temperature	-20°C TO 45°C			
Operating Humidity	20%-70% RH			
Storage Temperature	-30°C TO 80°C			
Storage Humidity	10%-75% RH			
Application	Indoor			
Enviroment Protection	RoHS			
Safety Certification	CE			

NEWLITE SOLUTIONS LTD


Measured Data of Lamp					
Voltage: 232.7 V	Current: 0.337 A	Power: 77 W	Power Factor: 0.98		
Total Flux	7525.80 lm	Central Intensity	1200.72 cd		
Lamp Efficiency	0.00%	Light Efficiency	97.74 lm/W		
Peak Intensity	2063.38 cd	Location of Peak(c, γ)	(320.0°, 33.3°)		
Half-Intensity Angle	133.2°	BeamAngle	178.2°		
Upward Light Ratio	0	Downward Light Ratio	100%		
Upward Street Side	0	Downward Street Side	3573.36 lm		
Upward House Side	0	Downward House Side	3952.29 lm		
Flash Area(76°)	0 cm2	Discomfort Glare(SLI)	0		

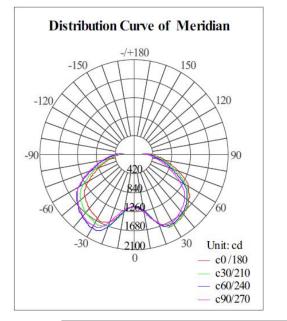

Illumination Cone Curve

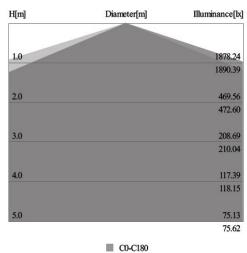




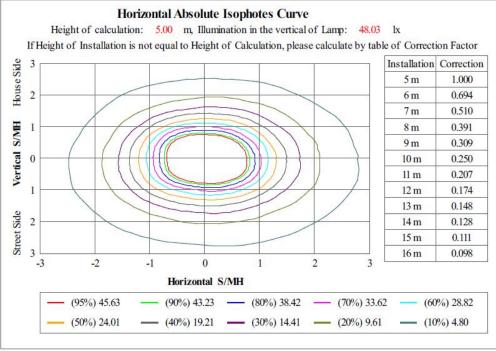

NEWLITE SOLUTIONS LTD

Package

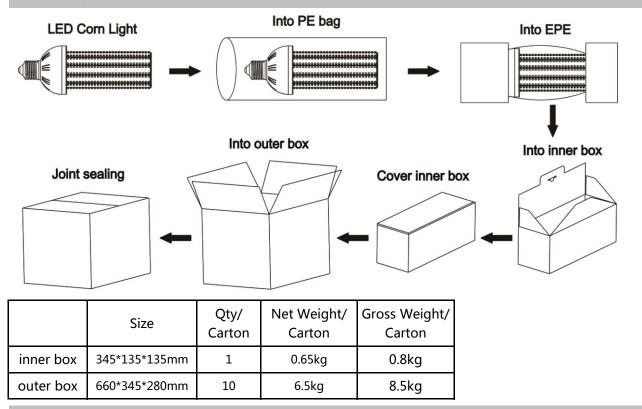

Notice For User


• Please turn off power before install or change assembly parts.

• The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.

• Make sure to remove or bypass the electronic ballast in the fixtures before install the lamps.

• 15W/20W with internal driver are suitable for closed fixtures, 30W/40W/60W/80W/100W/120W, please don't use the lamps in closed fixtures, for closed fixtures, we suggest using external drive for the lamps.

• No-professionals, must not install and disassemble the lamps.

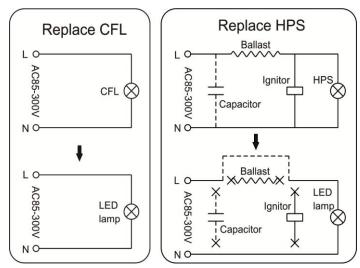

Trouble Shootings

Troubles	Check points	
Flickering of the lamps	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies	
Out of working	Please check the connection	

NEWLITE SOLUTIONS LTD